



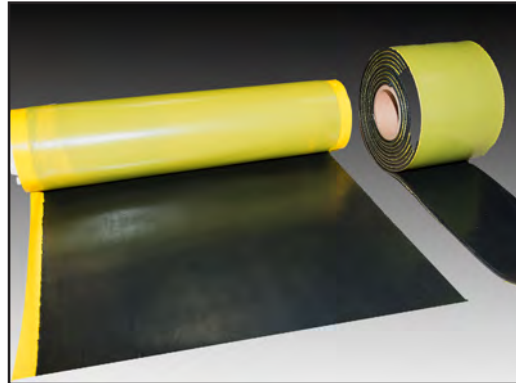

# Hot Splice Materials

## Pang Cover Stock & Tie Gum

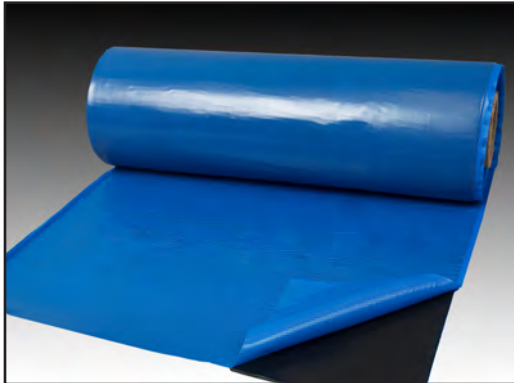

### PANG COVER STOCK & TIE GUM

Natural rubber blend with poly on both sides. Temperature range 250°F – 320°F.

Cat. No.	Dimensions	Box Qty.	Ft. / Roll	Lbs. / Roll
PCS018	1/8" (.125) x 20" x 16'	1	16	20
PCS116	1/16" (.063) x 20" x 22.5'	1	22.5	15
PCS132	1/32" (.031) x 20" x 41.5'	1	41.5	15
PCS316	3/16" (.188) x 20" x 16'	1	16	30

### CUSHION GUM

Natural rubber blend with poly on one side. Temperature range 250°F – 320°F.

Cat. No.	Dimensions	Box Qty.	Ft. / Roll	Lbs. / Roll
862	1/8" (.125) x 19" x 12'	1	12	15
863	1/16" (.063) x 1" x 66'	9	66	2
864	1/16" (.063) x 2" x 33	4	33	4
867	1/16" (.063) x 19" x 24'	1	24	15
868	1/32" (.031) x 19" x 53'	1	53	15

### LOW TEMP. CUSHION GUM

Poly on one side. Temperature range 210°F – 320°F.


Cat. No.	Dimensions	Box Qty.	Ft. / Roll	Lbs. / Roll
LC	1/16" (.063) x 2 1/8" x 100	3	100	6.8
LM	1/32" (.031) x 19" x 53'	1	53	15
LN	1/16" (.063) x 18" x 27.5'	1	27.5	15
LR/10#	3/16" (.188) x 20" x 16'	1	7.5	10
LT	1/8" (.125) x 1" x 32'	9	32	2
LX	1/4" x 6" x 13.25'	1	13.25	10

**THESE PRODUCTS ARE PRICED AND SOLD PER POUND.**

P.O. Box 486, Johnstown, Ohio 43031 USA  
 Customer Service: 1-800-705-2206 or 1-740-967-9015 Fax: 740-967-1039  
 Web: [www.pangindustrial.com](http://www.pangindustrial.com)



# Hot Splice Materials Breaker Fabric

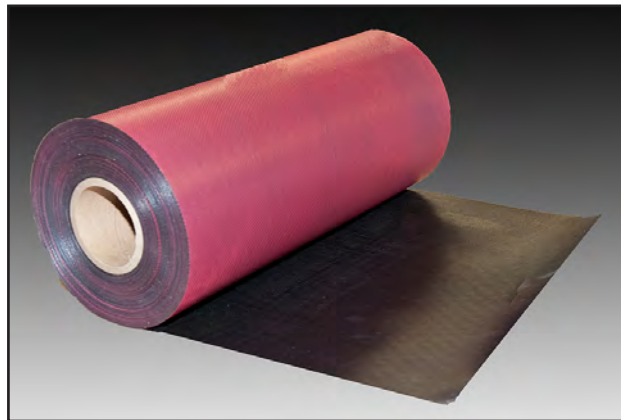

## NYLON REINFORCED GUM

Poly on one side. Temperature range 250°F – 320°F.

Cat. No.	Description	Dimensions	Box Qty.	Ft. / Roll	Lbs. / Roll
TCG	Nylon Cord Gum	1/32" (.031) x 28" x 60'	1	60	25
BN18	Nylon Cord Gum	1/32" (.031) x 18" x 93'	1	93	25
BH18	Nylon Cord Gum	3/64" (.040) x 18" x 74'	1	74	25
BT18	Square Woven Nylon Gum	1/16" (.063) x 18" x 45'	1	45	25

## BUTYL GUM

Poly on one side. Temperature range 250°F – 320°F.

Cat. No.	Dimensions	Box Qty.	Ft. / Roll	Lbs. / Roll
BTLG-125/10#	3/64" (.040) x 18" x 74'	1	26.5	10

THESE PRODUCTS ARE PRICED AND SOLD PER POUND.

P.O. Box 486, Johnstown, Ohio 43031 USA  
 Customer Service: 1-800-705-2206 or 1-740-967-9015 Fax: 740-967-1039  
 Web: [www.pangindustrial.com](http://www.pangindustrial.com)